
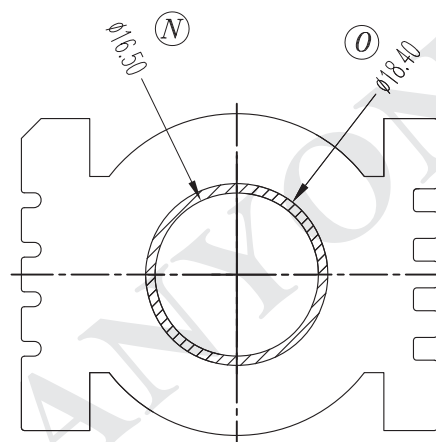
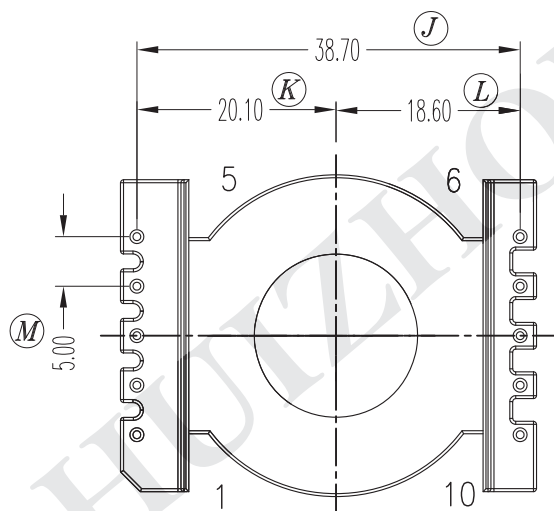
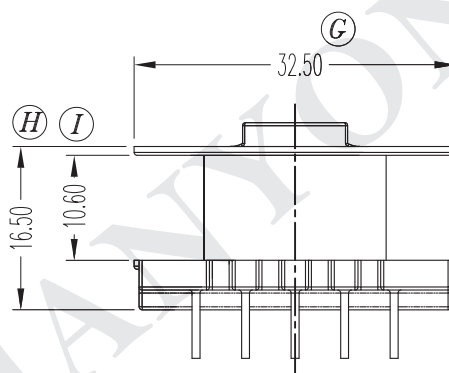
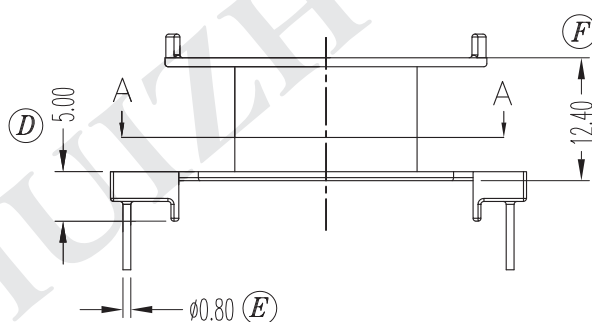




REV.	REVISIONS	REC.	DATE
A	FIRST RELEASE		2011.12.20

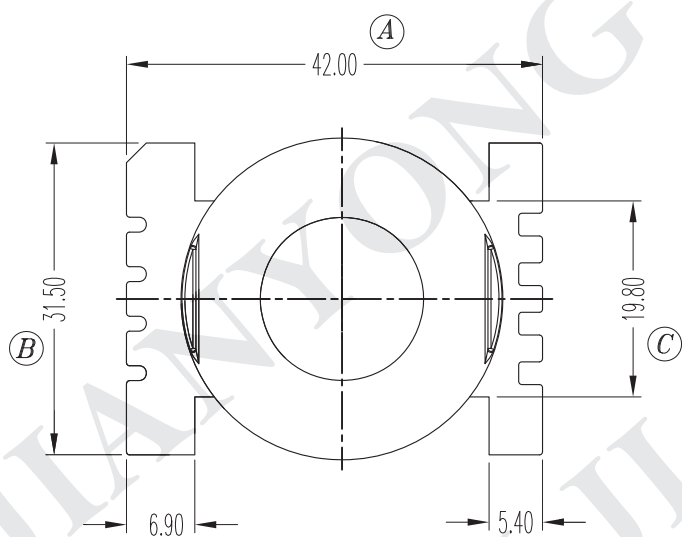

SEC. A-A

DRAWN & DRAFTED BY	CHEN XL	TOLERANCES		ANGLE: $\pm 1^\circ$	TITLE & DESC.: T-H BOBBIN CC40/20 (5+5 PIN)		
		0<L≤4 ±0.1	pin pitch ±0.2		MAINBODY MATERIAL: PHENOLIC PM9820		UL REC. UL 94V-0
CHECKED & APPROVED BY	J.RONG	4<L≤16 ±0.2		UNIT: MM	PIN MATERIAL: CP WIRE		PIN RETENTION LOAD: 1.5 KGF MIN
 惠州市建永绝缘制品有限公司 HUIZHOU JIANYONG INSULATED PRODUCT CO., LTD 惠州市建鑫实业有限公司 HUIZHOU JIANXIN INDUSTRIAL CO., LTD		SCALE: 1:1		DATE: DEC.20 '2011		DRAWING NO. JT-4002	REV. A