

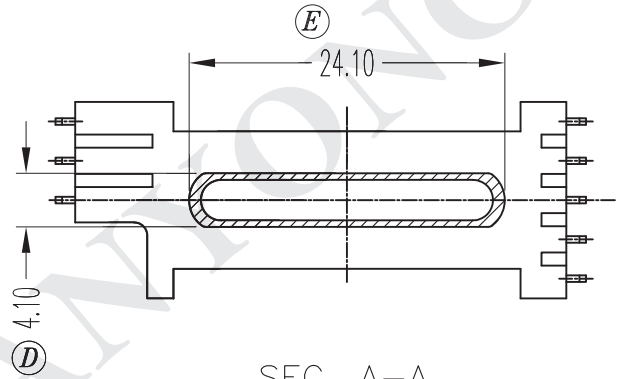
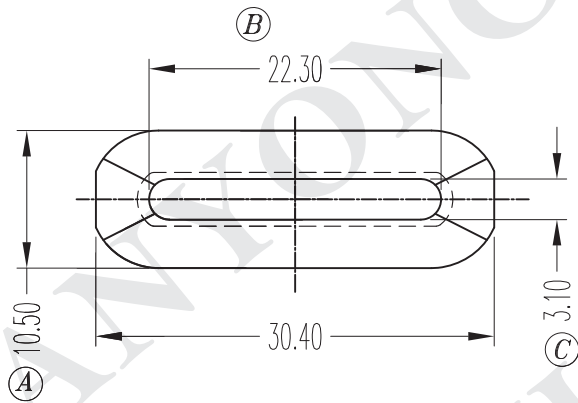
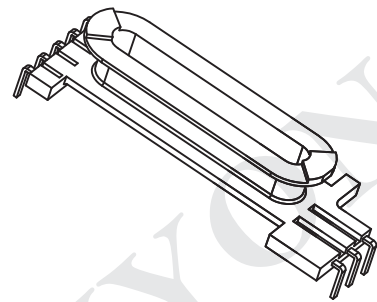
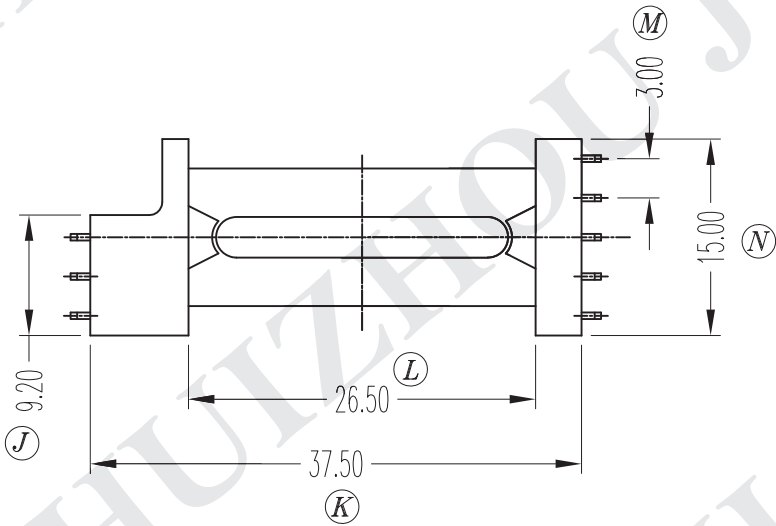


REV.	REVISIONS	REC.	DATE
A	FIRST RELEASE		2012.03.03

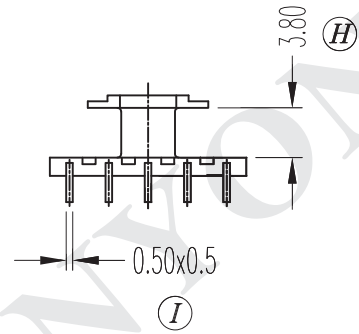

SEC. A-A

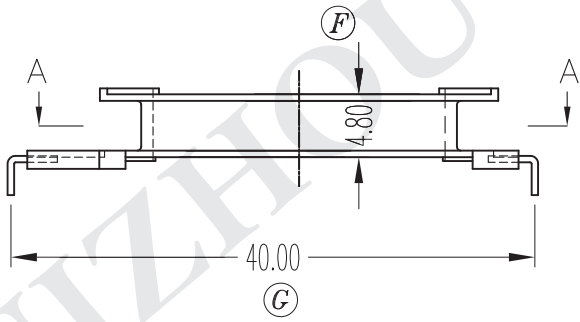

DRAWN & DRAFTED BY	CHEN XL	TOLERANCES		ANGLE: ±1°	TITLE & DESC.: L PIN BOBBIN EDR-26 (5+3 PIN)		
CHECKED & APPROVED BY	J.RONG	0<L≤4 ±0.1	pin pitch ±0.2	UNIT: MM	MAINBODY MATERIAL: PHENOLIC PM9820		UL REC. UL 94V-0
		4<L≤16 ±0.2					
		16<L≤63 ±0.3		SCALE: 1:1	PIN MATERIAL: CP WIRE		PIN RETENTION LOAD: 0.8 KGF MIN
 惠州市建永绝缘制品有限公司 HUIZHOU JIANYONG INSULATED PRODUCT CO., LTD					DATE: MAR.03 '2012	DRAWING NO. JT-2601	REV. A
 惠州市建鑫实业有限公司 HUIZHOU JIANXIN INDUSTRIAL CO., LTD							