
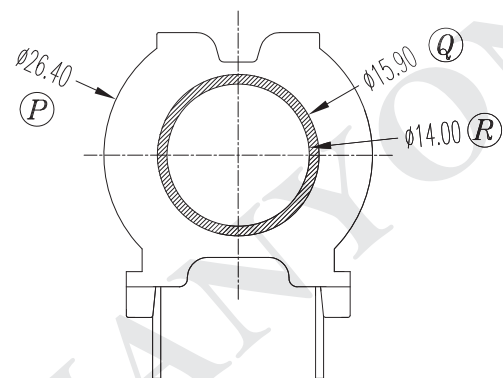
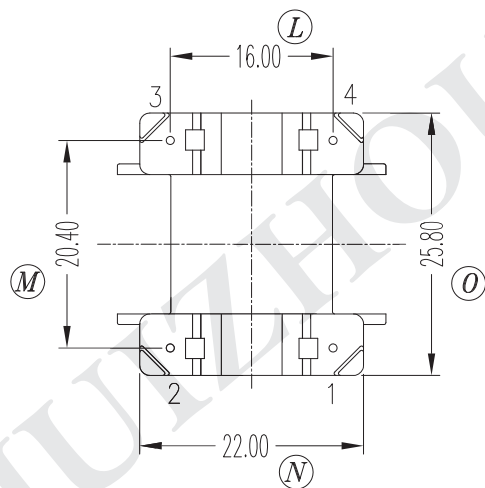
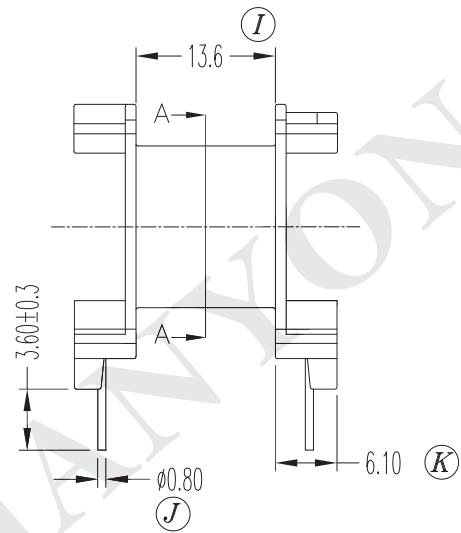
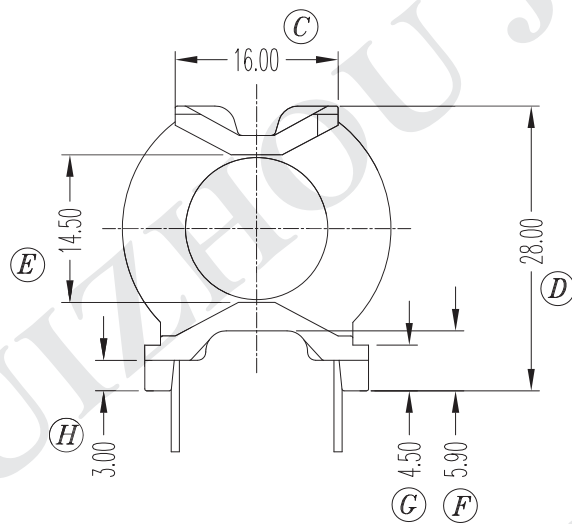


REV.	REVISIONS	REC.	DATE
A	FIRST RELEASE		2012.12.03

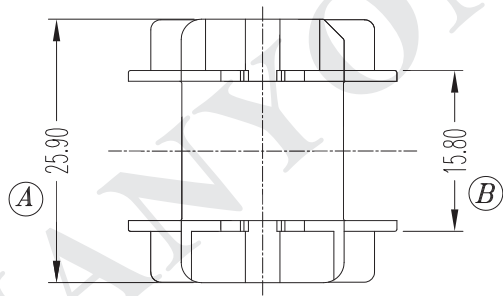

SEC. A-A

DRAWN & DRAFTED BY	CHEN XL	TOLERANCES		ANGLE: ±1°	TITLE & DESC.: T-H BOBBIN PQ32 (2+2 PIN)				
		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	pin pitch ±0.2		MAINBODY MATERIAL: PHENOLIC		UL REC. UL 94V-0		
CHECKED & APPROVED BY	J.RONG				UNIT: MM	PIN MATERIAL: CP WIRE		PIN RETENTION LOAD: 1.0 KGF MIN	
 惠州市建永绝缘制品有限公司 HUIZHOU JIANYONG INSULATED PRODUCT CO., LTD 惠州市建鑫实业有限公司 HUIZHOU JIANXIN INDUSTRIAL CO., LTD					SCALE: 1:1	DATE: DEC.03 '2012		DRAWING NO. JT-3206	REV. A
									