

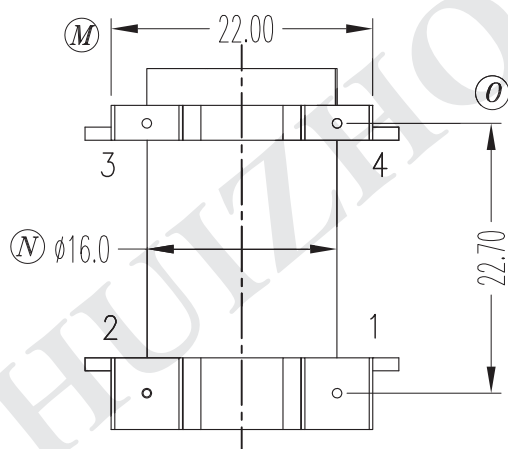
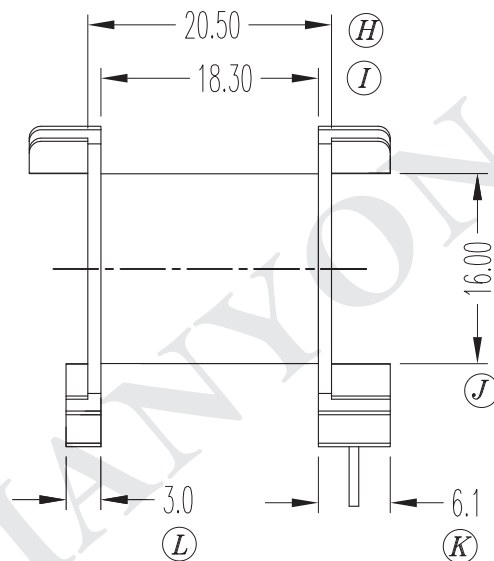
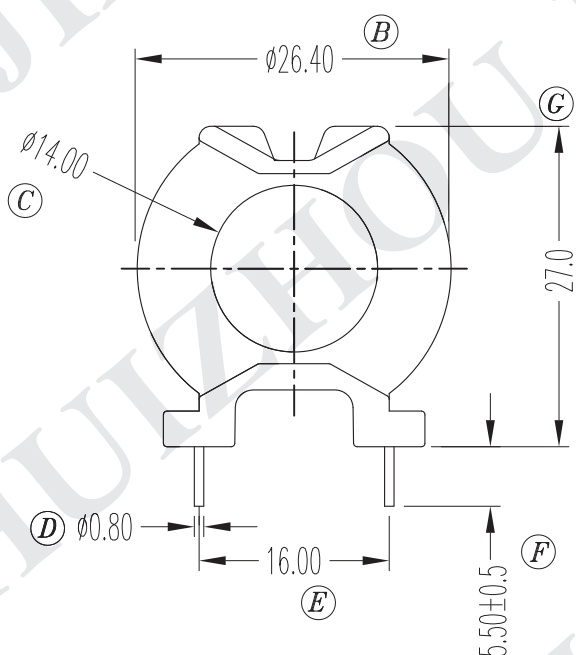



REV.	REVISIONS REC.	DATE
A	FIRST RELEASE	2011.12.18
B	ADD RADII ON THE FLANGE	2012.04.12

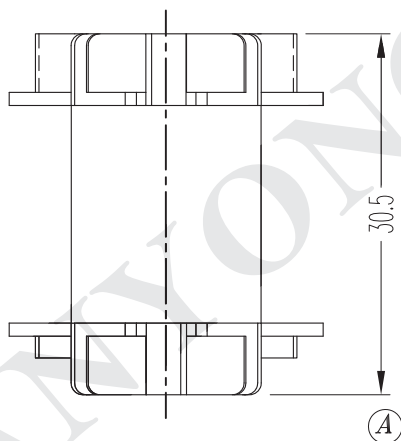

NOTE: PIN 3, 4 REMOVED

DRAWN & DRAFTED BY	CHEN XL	TOLERANCES		ANGLE: $\pm 1^\circ$	TITLE & DESC.: T-H BOBBIN PQ32X60 (2+2 PIN)		
		0<L≤4 ±0.1	pin pitch ±0.2		MAINBODY MATERIAL: PHENOLIC PM9820		UL REC. UL 94V-0
CHECKED & APPROVED BY	J.RONG	4<L≤16 ±0.2		UNIT: MM	PIN MATERIAL: CP WIRE		PIN RETENTION LOAD: 1.0 KGF MIN
 惠州市建永绝缘制品有限公司 HUIZHOU JIANYONG INSULATED PRODUCT CO., LTD 惠州市建鑫实业有限公司 HUIZHOU JIANXIN INDUSTRIAL CO., LTD		SCALE: 1:1		DATE: APR.12 '2012	DRAWING NO. JT-3203		REV. B
							