
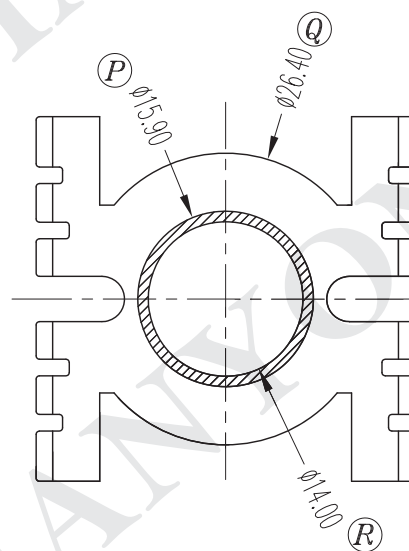
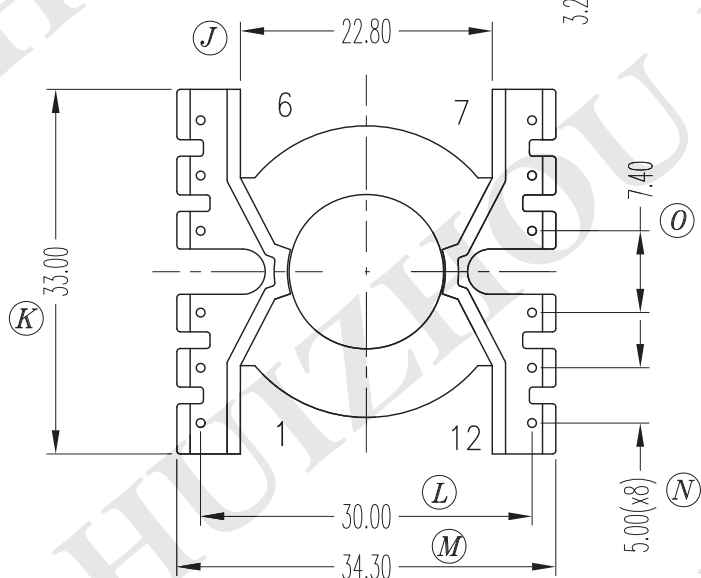
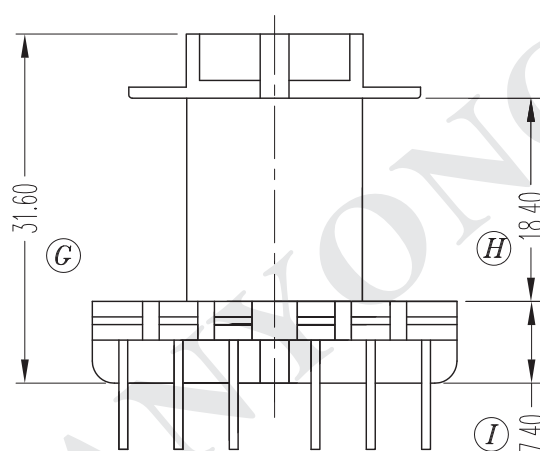
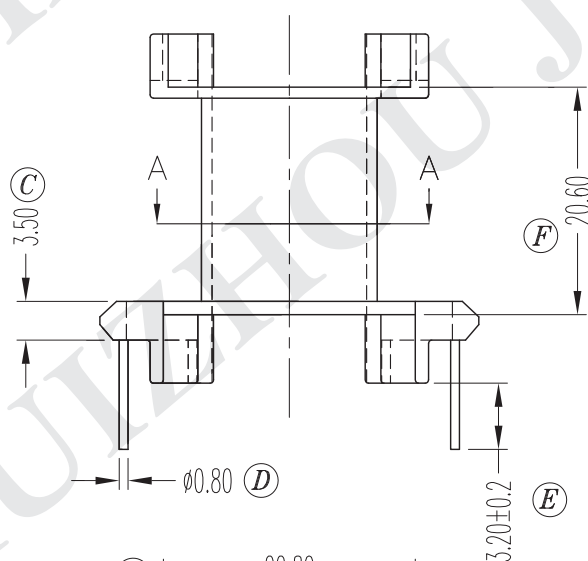



REV.	REVISIONS	REC.	DATE
A	FIRST RELEASE		2011.08.18

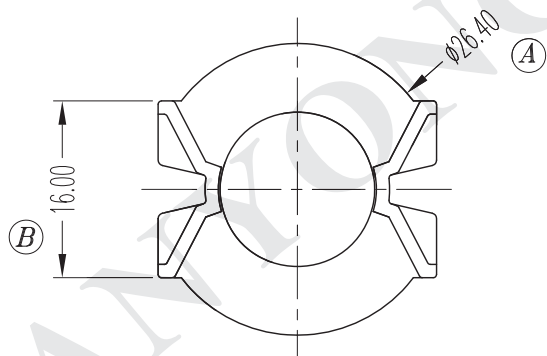

SEC. A-A

DRAWN & DRAFTED BY	CHEN XL	TOLERANCES		ANGLE:	TITLE & DESC.:		
		0<L≤4 ±0.1	pin pitch ±0.2	±1°	T-H BOBBIN PQ3230 (6+6 PIN)		
CHECKED & APPROVED BY	J.RONG	4<L≤16 ±0.2		UNIT:	MAINBODY MATERIAL:		UL REC.
		16<L≤63 ±0.3	MM	PHENOLIC		UL 94V-0	
	惠州市建永绝缘制品有限公司			SCALE:	PIN MATERIAL:		PIN RETENTION LOAD:
	HUIZHOU JIANYONG INSULATED PRODUCT CO., LTD			1:1	CP WIRE		0.8 KGF MIN
	惠州市建鑫实业有限公司				DATE:	DRAWING NO.	REV.
HUIZHOU JIANXIN INDUSTRIAL CO., LTD			AUG,18 '2011		JT-3201	A	