
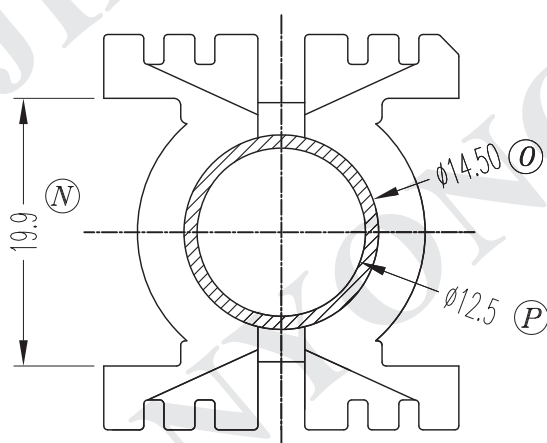
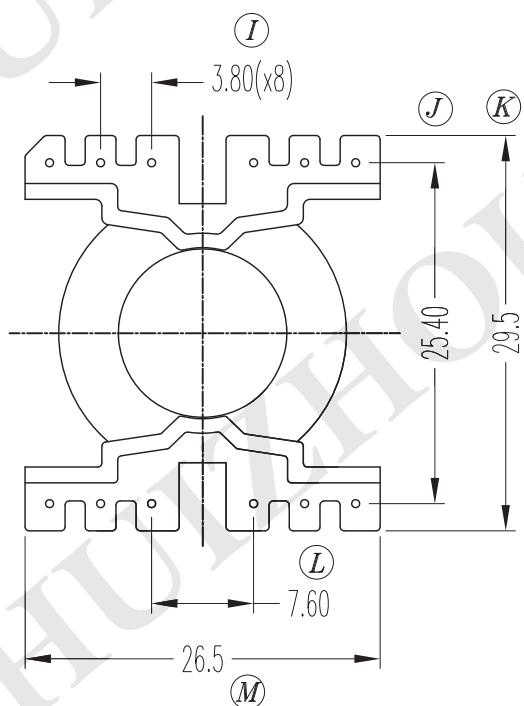
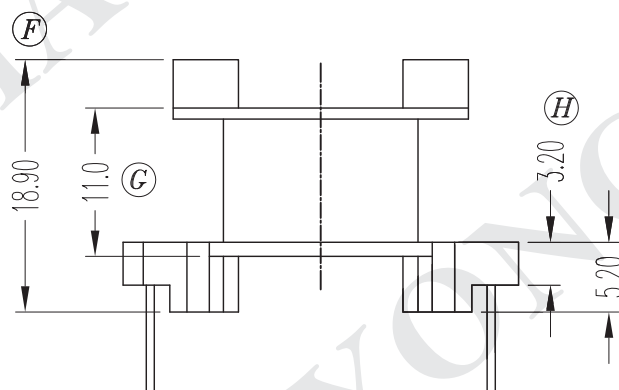
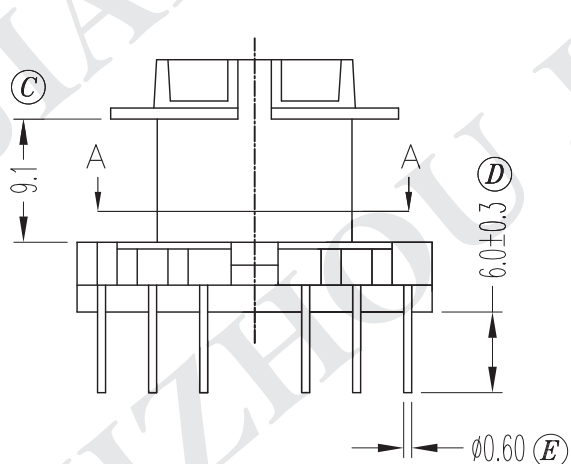


REV.	REVISIONS	REC.	DATE
A	FIRST RELEASE		2012.03.20

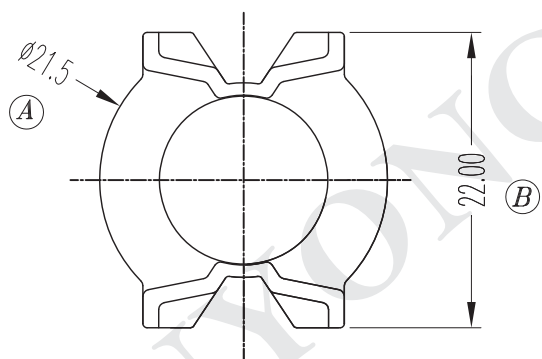

SEC. A-A

DRAWN & DRAFTED BY	CHEN XL	TOLERANCES		ANGLE: $\pm 1^\circ$	TITLE & DESC.: T-H BOBBIN PQ2620 (6+6 PIN)		
		0<L≤4 ±0.1	pin pitch ±0.2	UNIT: MM	MAINBODY MATERIAL: PHENOLIC PM9820	UL REC. UL 94V-0	
CHECKED & APPROVED BY	J.RONG	4<L≤16 ±0.2					
		16<L≤63 ±0.3		SCALE: 1:1	PIN MATERIAL: CP WIRE	PIN RETENTION LOAD: 1.2 KGF MIN	
 惠州市建永绝缘制品有限公司 HUIZHOU JIANYONG INSULATED PRODUCT CO., LTD					DATE: MAR.20 '2012	DRAWING NO. JT-2602	REV. A
惠州市建鑫实业有限公司 HUIZHOU JIANXIN INDUSTRIAL CO., LTD							