

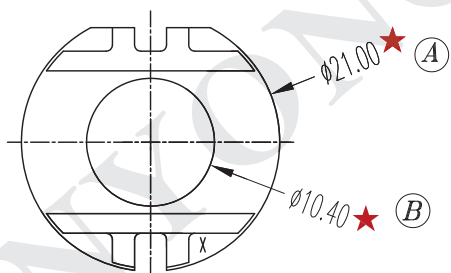
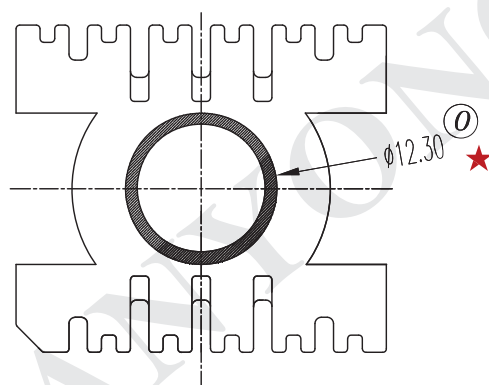
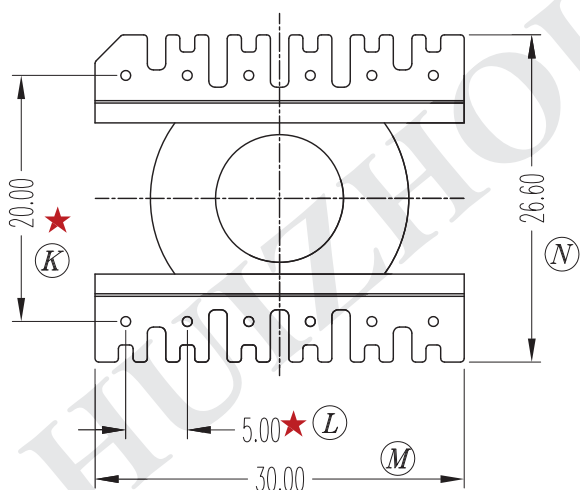


| REV. | REVISIONS     | REC. | DATE       |
|------|---------------|------|------------|
| A    | FIRST RELEASE |      | 2012.06.02 |
|      |               |      |            |
|      |               |      |            |

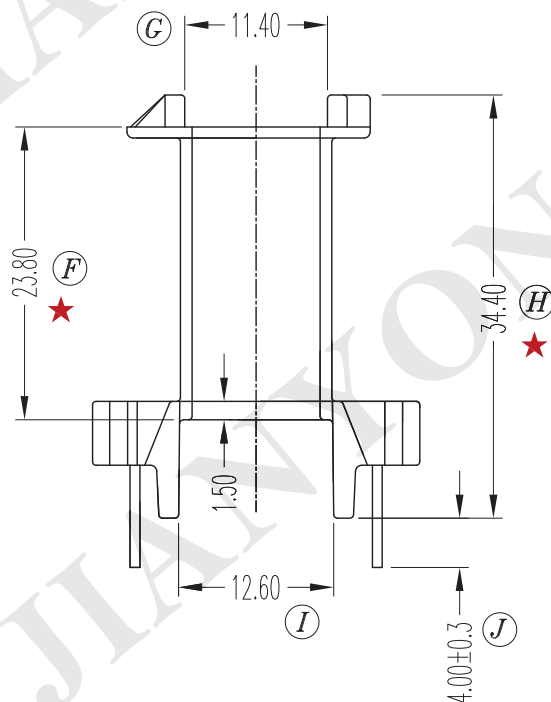

技术要求:

1. 未注圆角为R0.3
2. 标★号尺寸为重点尺寸

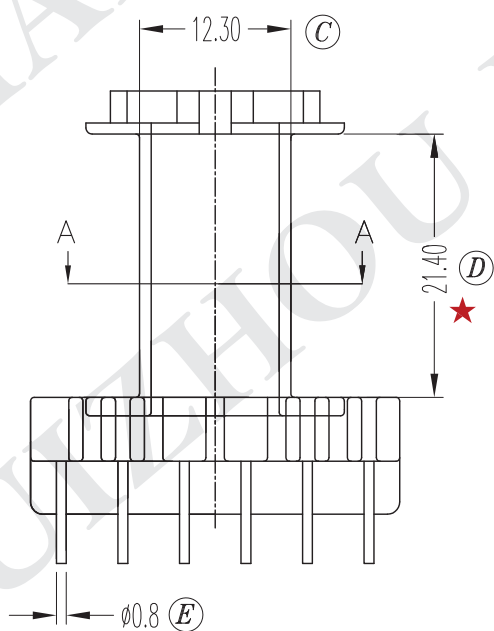

SEC. A-A

|                                                                                                                                                 |         |              |                   |                                                                                     |                                               |                                    |           |
|-------------------------------------------------------------------------------------------------------------------------------------------------|---------|--------------|-------------------|-------------------------------------------------------------------------------------|-----------------------------------------------|------------------------------------|-----------|
| DRAWN &<br>DRAFTED BY                                                                                                                           | CHEN XL | TOLERANCES   |                   | ANGLE:<br>$\pm 1^\circ$                                                             | TITLE & DESC.:<br>T-H BOBBIN ERL-28 (6+6 PIN) |                                    |           |
|                                                                                                                                                 |         | 0<L≤4 ±0.1   | pin pitch<br>±0.2 | UNIT:<br>MM                                                                         | MAINBODY MATERIAL:<br>PHENOLIC                | UL REC.<br>UL 94V-0                |           |
| CHECKED &<br>APPROVED BY                                                                                                                        | J.RONG  | 4<L≤16 ±0.2  |                   |                                                                                     |                                               |                                    |           |
|                                                                                                                                                 |         | 16<L≤63 ±0.3 |                   | SCALE:<br>1:1                                                                       | PIN MATERIAL:<br>CP WIRE                      | PIN RETENTION LOAD:<br>1.0 KGF MIN |           |
|  惠州市建永绝缘制品有限公司<br>HUIZHOU JIANYONG INSULATED PRODUCT CO., LTD |         |              |                   |  | DATE:<br>JUN.02 '2012                         | DRAWING NO.<br>JT-2801-1           | REV.<br>A |
| 惠州市建鑫实业有限公司<br>HUIZHOU JIANXIN INDUSTRIAL CO., LTD                                                                                              |         |              |                   |                                                                                     |                                               |                                    |           |