
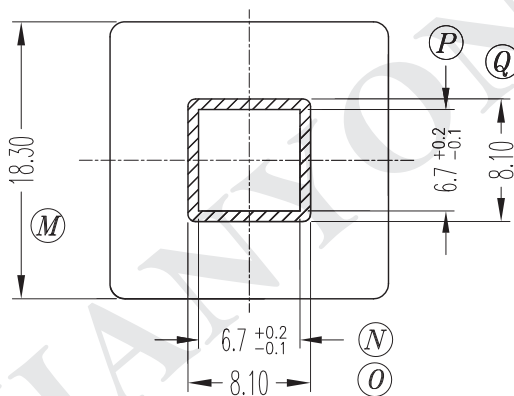
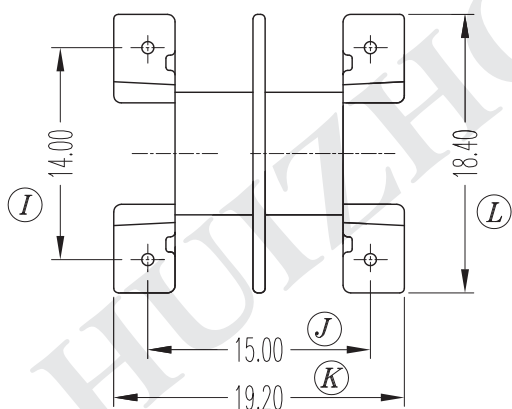
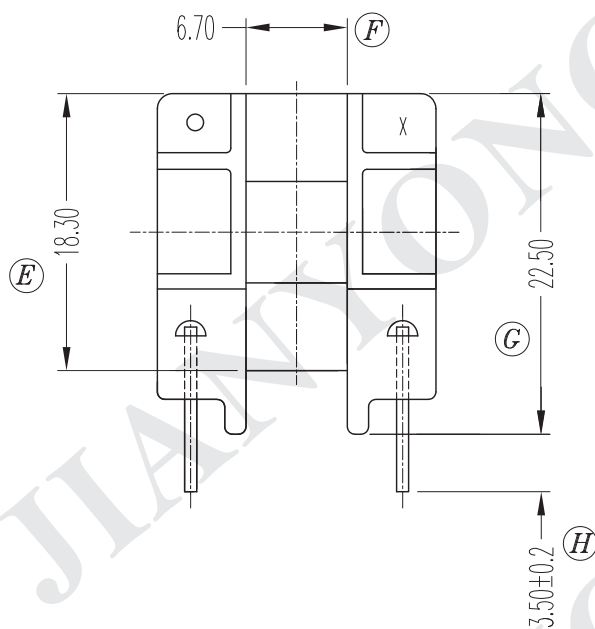
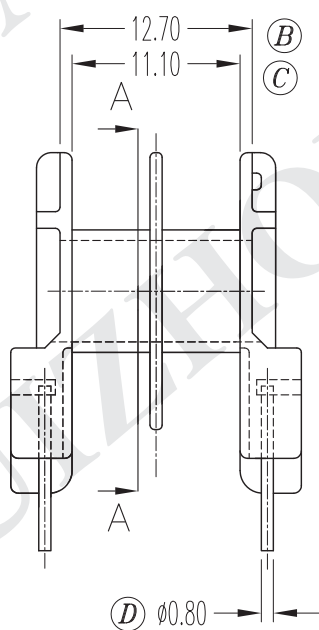



REV.	REVISIONS	REC.	DATE
A	FIRST RELEASE		2012.03.08

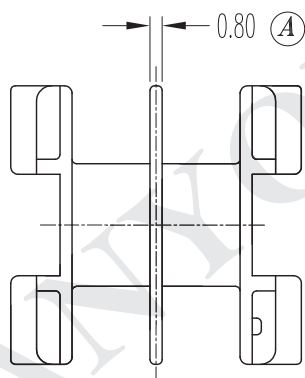

SEC. A-A

DRAWN & DRAFTED BY	CHEN XL	TOLERANCES		ANGLE: $\pm 1^\circ$	TITLE & DESC.: T-H BOBBIN EE-25V (2+2 PIN)		
		0<L≤4 ±0.1 4<L≤16 ±0.2 16<L≤63 ±0.3	pin pitch ±0.2	UNIT: MM	MAINBODY MATERIAL: PBT	UL REC. UL 94V-0	
CHECKED & APPROVED BY	J.RONG			SCALE: 1:1	PIN MATERIAL: CP WIRE	PIN RETENTION LOAD: 1.5 KGF MIN	
 惠州市建永绝缘制品有限公司 HUIZHOU JIANYONG INSULATED PRODUCT CO., LTD		惠州市建鑫实业有限公司 HUIZHOU JIANXIN INDUSTRIAL CO., LTD			DATE: MAR.08 '2012	DRAWING NO. JT-2501-1	REV. A